




## **Plate Thickness**

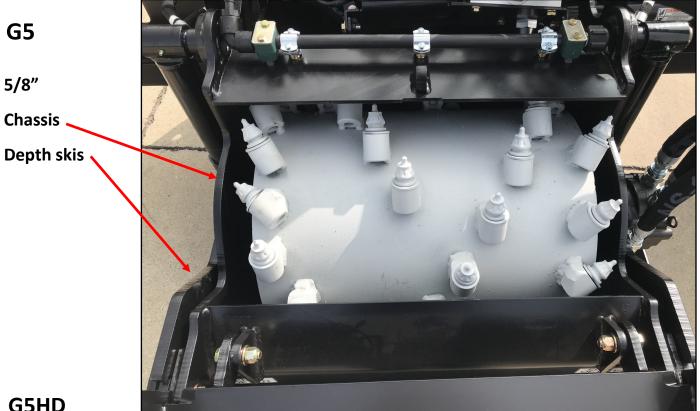

G5HD

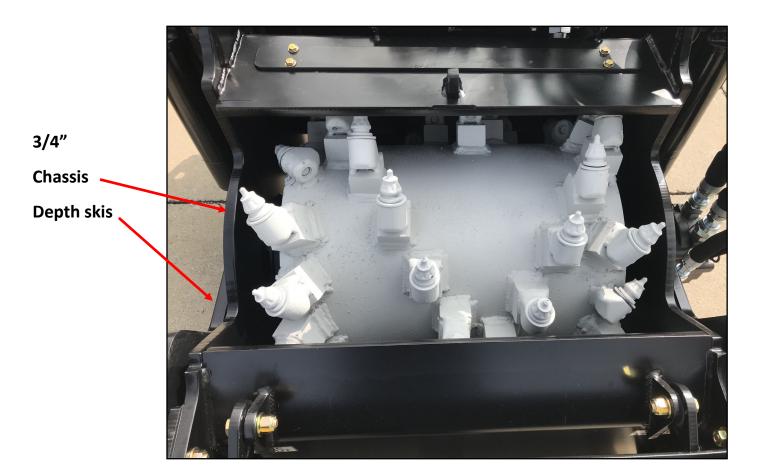


# **Drum Thickness & Hardfacing**

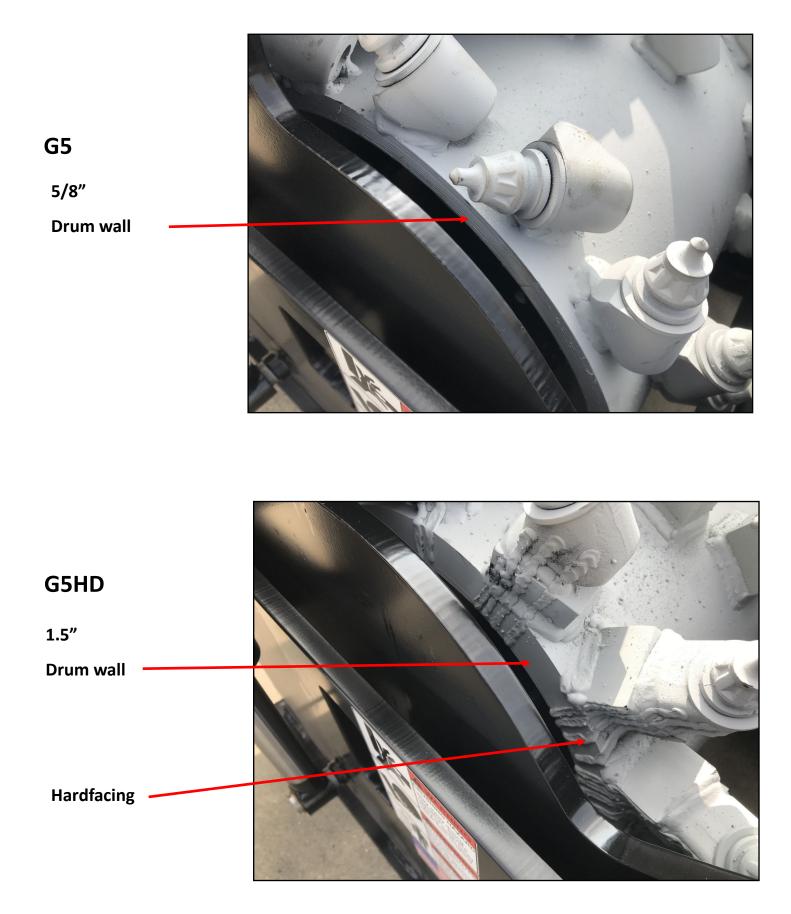

# **Cutting Depth & Tooth Clearance**


**G5** 

0-6" depth

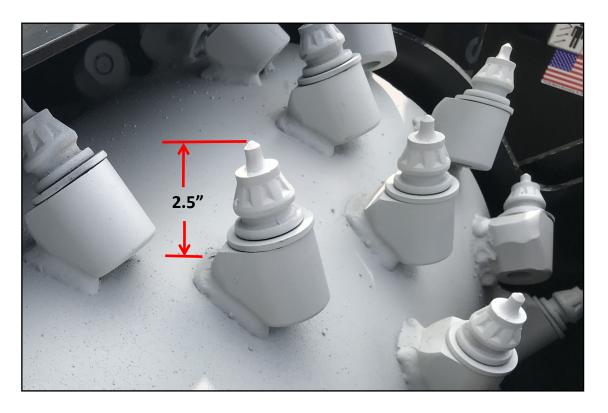



0 - 8" depth

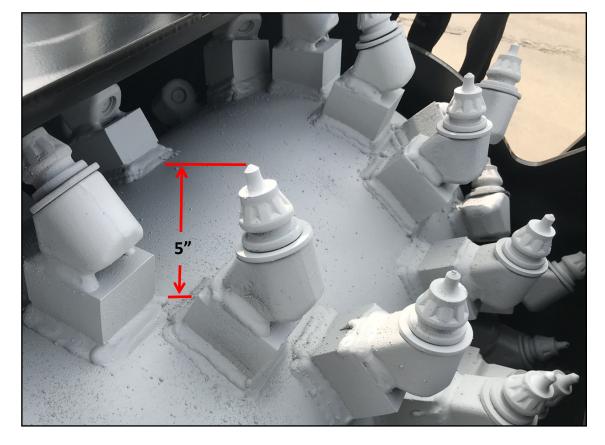

### **Depth Cylinders & Front Debris Guard**



Rubber Flap



**G5** 

G5HD

1.5" cyl. rod



Steel guard

### Summary

	G5	G5HD	Benefit
Drum wall thickness	5/8"	1.5"	Adds weight over the center of the cut; increased longevity
Clearance, drum surface to tooth tip	2.5"	5"	Reduces drag in cuts below 2.5" which yields higher productivity
Drum housing plate thickness	5/8"	3/4"	Higher strength and added weight
Depth ski plate thickness	5/8"	3/4"	Superior ski stability and longer life
Cutting depth	0 - 6"	0 - 8"	Allows deeper cuts for base repair and stabilization work
Depth cylinder rod diameter	1.25″	1.5″	20% thicker for added strength and longer service life
Hardfacing	No	Yes	Extends the wear properties of both drum edge and holder
Front guard material	Rubber	Steel	Exceptional durability and reduced material discharge
Weight difference		+ 21%	Reduced vibration, which increases productivity and component life